





EC AXIAL FANS

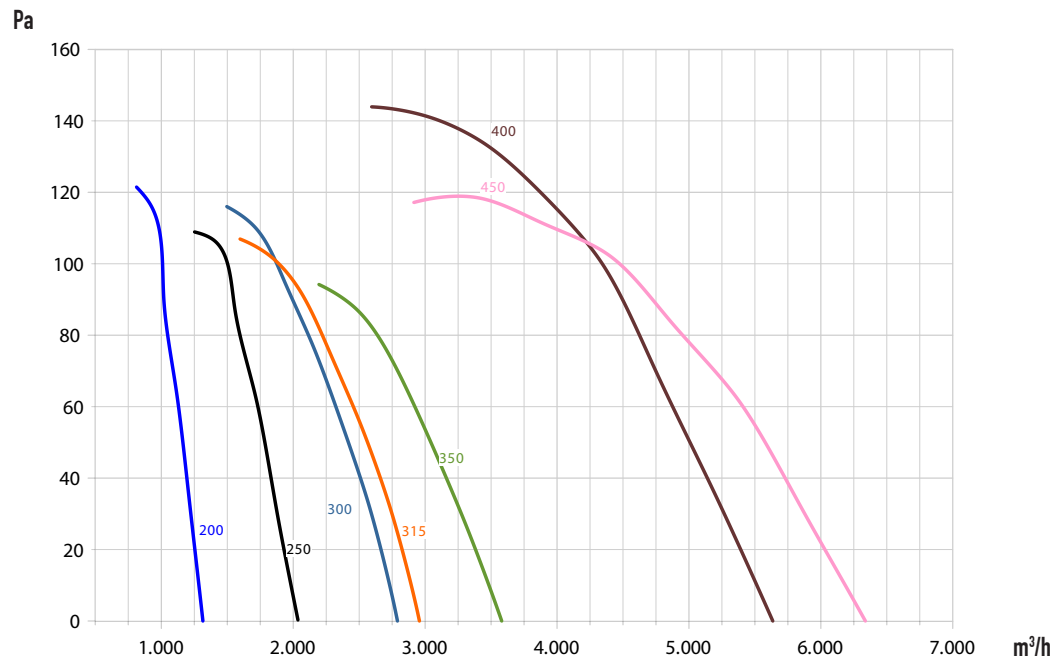


- Available sizes diameter from Ø200mm to Ø450mm
- Impeller made in Plastic.
- Brushless motors IP44 with electric supply 230V-1-50/60Hz.
- Motors include a long lead with tachometer signal output, 10VDC output and 0-10VDC input cable for speed control.

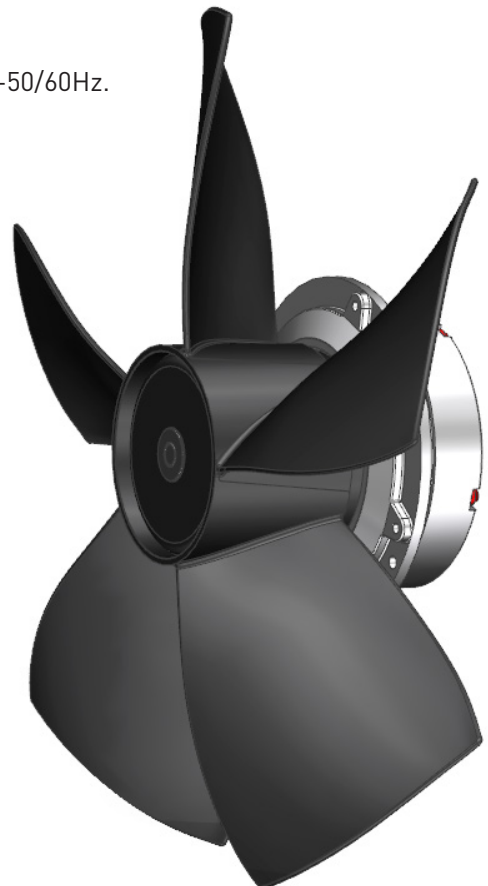



HRB/3-HRT/3 RANGE

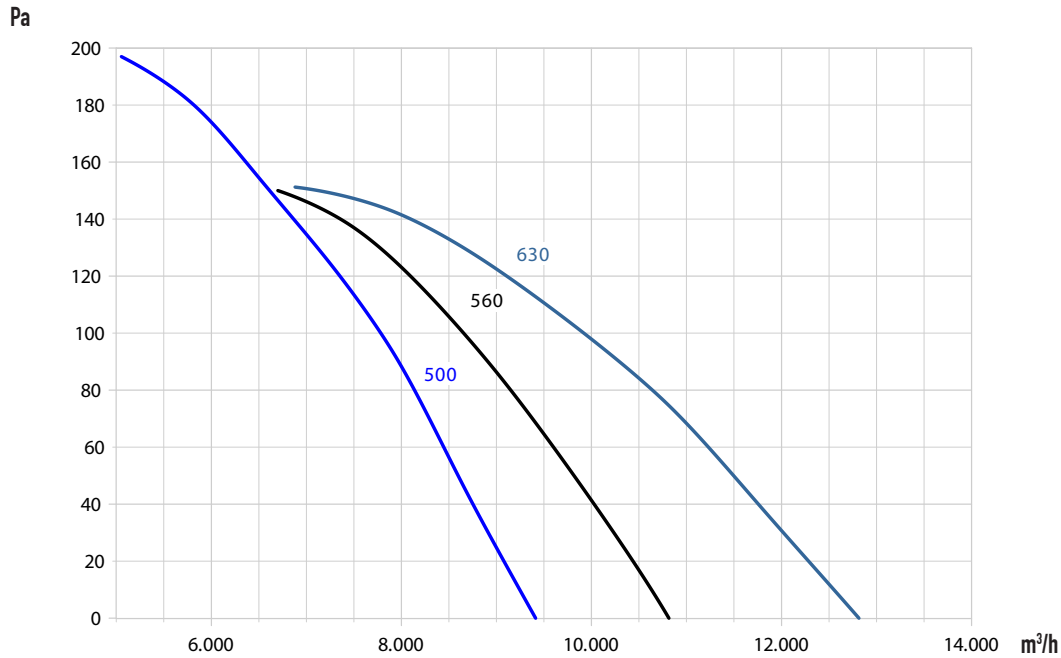

- Available sizes diameter from Ø500mm to Ø630mm
- Impeller made in Aluminium.
- Brushless motors IP54 with electric supply 230V-1-50/60Hz or 400V-3-50/60Hz.
- Technical Features:

Control input 0-10 V / 4-20 mA / PWM

Input sensor 0-10 V or 4-20 mA

Slave output 0-10 V (5 mA)

Output 10 VDC (10 mA)

Output 24 VDC (100 mA)

Integrated PI controller

Active Power Factor Correction, PFC


RS-485 ModBus-RTU Alarm relay

External ON/OFF

Leakage current ≤ 3.5 mA

Hall output (1 pulse/rev.)



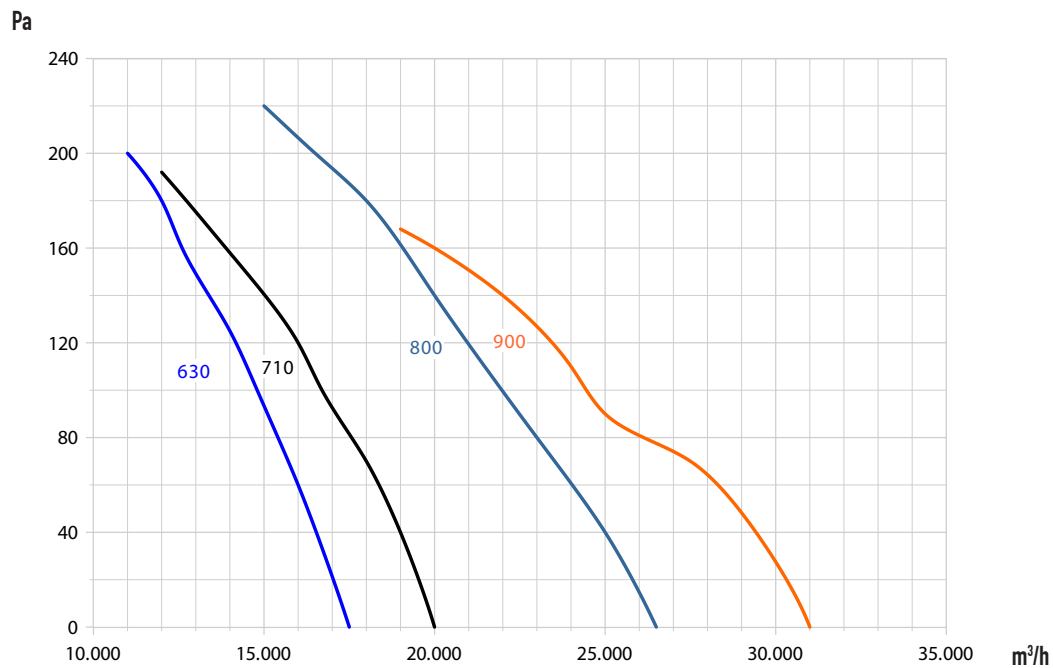

- Available sizes diameter from Ø630mm to Ø910mm
- Impeller made in Die Cast Aluminium.
- Brushless motors IP54 with electric supply 400V-3-50/60Hz.
- Technical Features:

Control input 0-10 V / 4-20 mA / PWM

Input sensor 0-10 V or 4-20 mA

Slave output 0-10 V (5 mA)

Output 10 VDC (10 mA)

Output 24 VDC (100 mA)

Integrated PI controller

Active Power Factor Correction, PFC


RS-485 ModBus-RTU Alarm relay


External ON/OFF

Leakage current ≤ 3.5 mA

Hall output (1 pulse/rev.)

Bluetooth communication

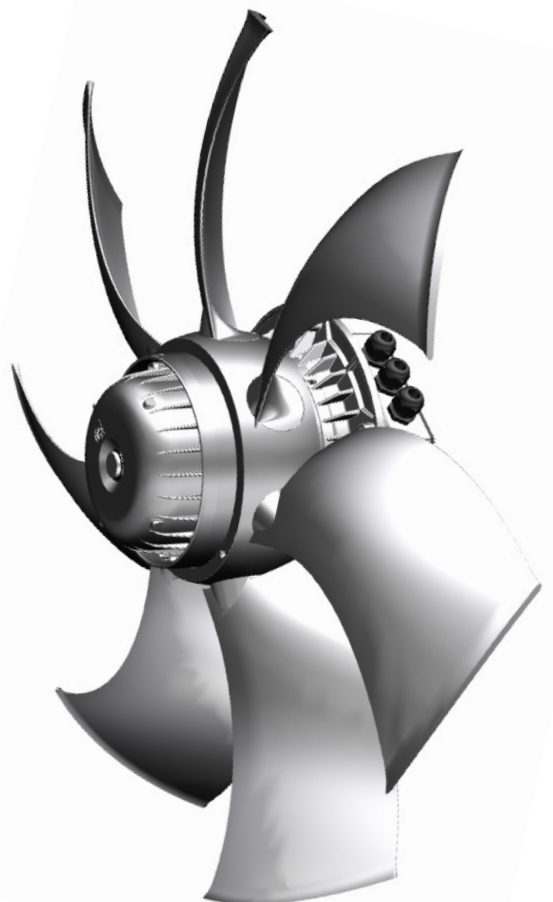

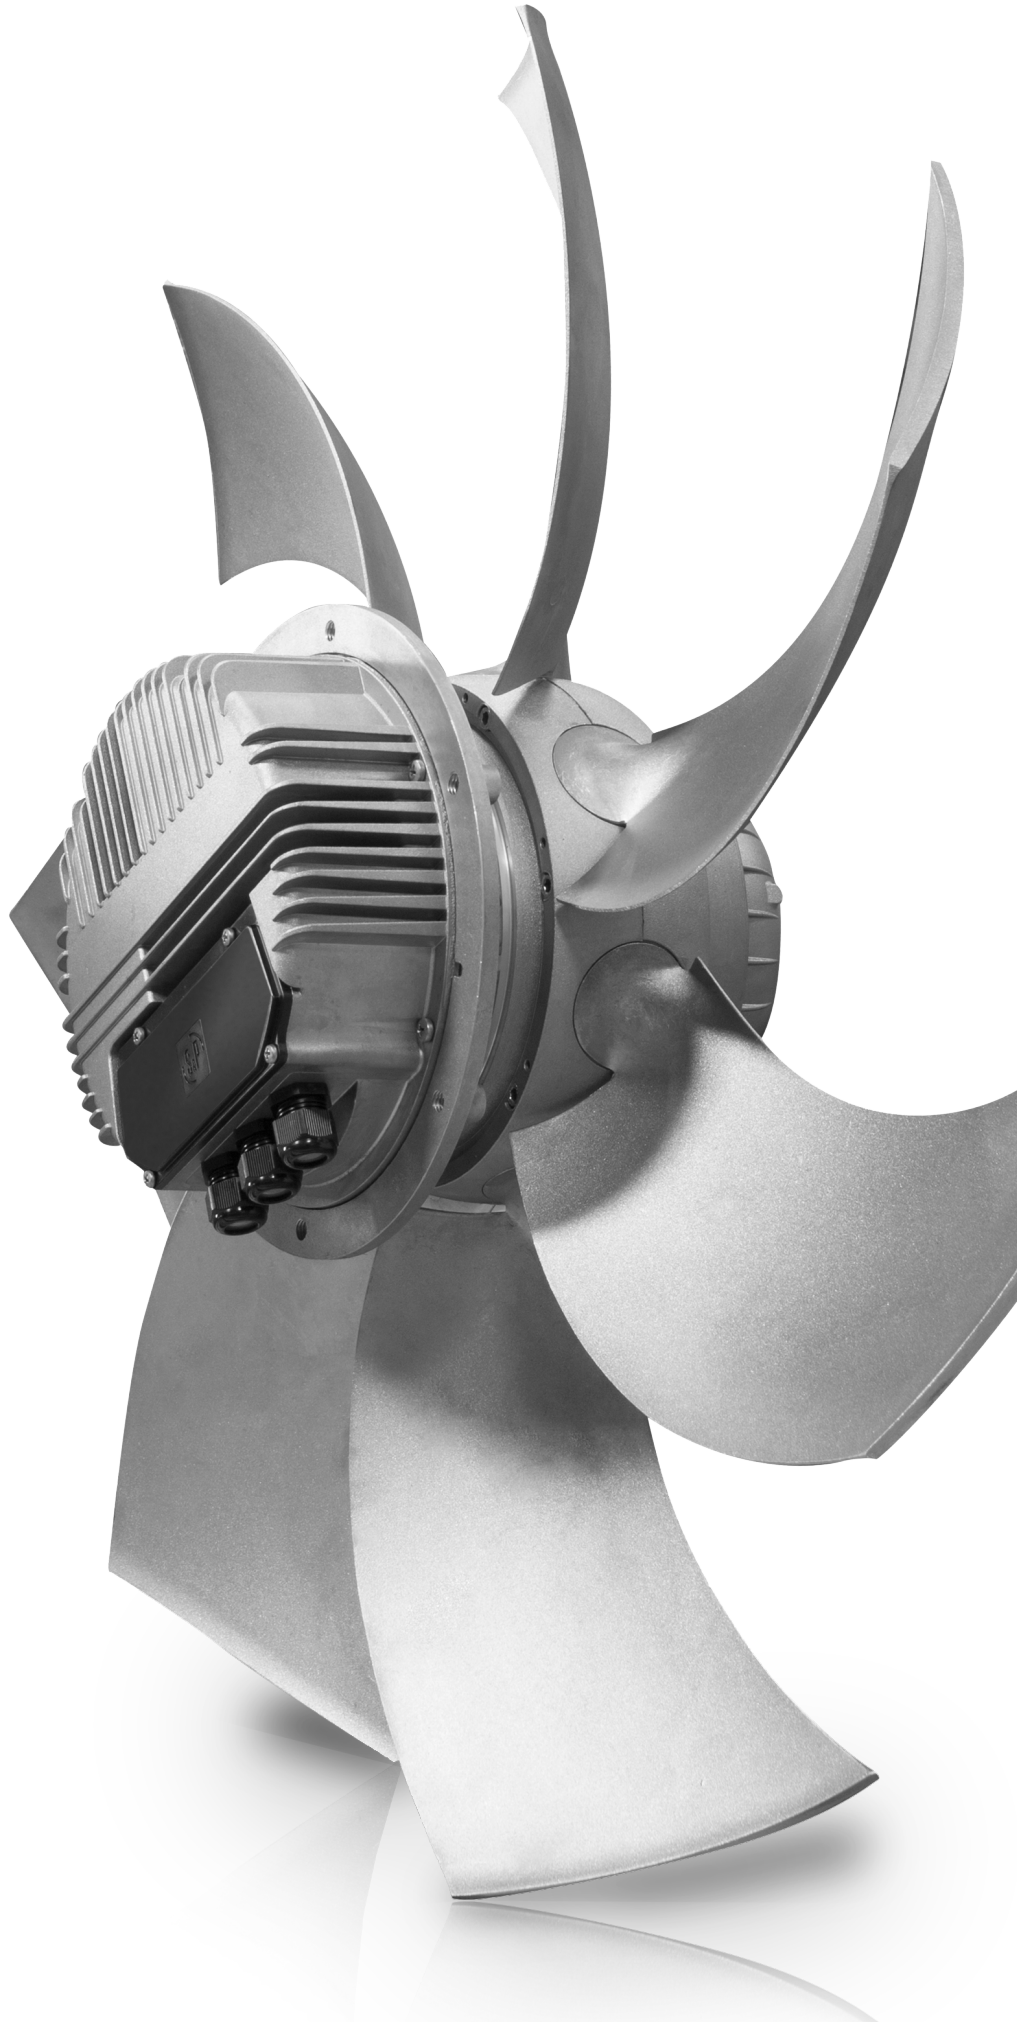

ectechnology





Llevant, 4
Polígono Industrial Llevant
08150 Parets del Vallès
Barcelona - Spain

Tel. +34 93 571 93 00
Fax. +34 93 571 93 01

oem.info@solerpalau.com
www.solerpalau.com

Technical specifications for information purposes only.
Soler & Palau S.A. reserves the right to change them without any previous notice.